




Shenzhen HLL Technology CO., LTD.

P6 Indoor Full Color Specification

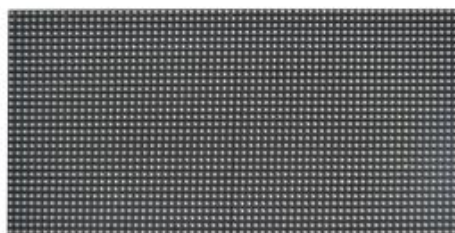

Specification		
Size:384mm×192mm		
LED color:1R1G1B 3in1 led 3528		
Module Power Consumption 6A / 30W		
Constant Current Drive:1/16Scan IC SM16016		
RLED Epistar{350-400CD} Wavelength625±2nm		
GLED Epistar{6500--750CD} Wavelength520±2nm		
BLED Epistar{200--300CD} Wavelength470±2nm		
Weight 0.38kg		
Module Thickness 1.3CM		
Brightness 1200CD		
Module Pixel 64×32=2048 Dot Pixel 6mm		
LEDAngle Horizontal≥140° Vertical≥140°		
Connector: HUB75		
Color Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 Year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Continuous working time≥48hrs	
	Pixel	27777 Dot
	Best view distance 6m--100m	
	Average Power consumption 200W/m²	
	ValtageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 45CM by 2		Flat cable 20CM
Carton Size 47*44*43		Volume 0.088CBM
Weight 17.30kg		QTY/CTN 30PCS/CTN
		13.56PCS/SQM

Hotline: 18998946779(WhatsApp) skype:championled www.ledhll.com

M13.33 Outdoor full color module




Specification		
Size:320mm×160mm		
LED color:1R1G1B 246 led		
Power consumption 4.0A / 20W		
Drive:1/6 scan IC JXI5020/SM16016		
Red LED Epistar 7mil{550-600CD} wavelength620±2nm		
GreenLED Huachan8mil{1800--2000CD} wavelength525±2nm		
Blue LED Huachan8mil {350--450CD} wavelength470±2nm		
Module weight 0.519kg		
Module thickness 2.2CM		
Brightness 3500CD		
Module Pixel 24x12=288dot 13.33mm		
LED Angle Horizontal≥90° Vertical≥45°		
Connector: HUB08		
Ratio: R:G:B/3:6:1		
Warranty	Use life 75000hrs	
	Warranty One year	
	Pixel	5625dot/sqm
Screen Parameter	Brightness, automatic adjust by sensors	
	Continuous working time≥48hrs	
	Best view distance 13m--190m	
	Average Power consumption 210W/m²	
	AC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable:20CM		Flat cable 20CM
Carton size:63.2*37.8*36.5		Volume 0.087CBM
Weight:22kg/ctn		QTY/CTN 36PCS/ctn
		19.55pcs modules/sqm

M10 OutdoorSave Energy Full color Module



Specification	
Size:320mm×160mm	
LED color:1R1G1B 246 led	
Module Power Consumption 4.5A / 22.5W	
Drive:1/8Scan IC JXI5020/SM16016	
RLED Epistar7mil{550-600CD} Wavelength620±2nm	
GLED Epistar8mil{1800--2000CD} Wavelength525±2nm	
BLED Epistar8mil {350--450CD} Wavelength470±2nm	
Weight 0.58kg	
Module Thickness 2.2CM	
Brightness 4500CD	
Module Pixel 32×16=512 Dot Pixel 10mm	
LEDAngle Horizontal≥100° Vertical≥50°	
Connector: HUB08	
Color Ratio: R:G:B/3:6:1	
Warranty	Use Life 75000Hrs
	Warranty 2 Year
Screen Parameter	Brightness, automatic adjust by sensors
	Pixel:10000 Dot
	Continuous working time ≥48hrs
	Best view distance 10m--180m
	Average Power consumption 220W/m²
VoltageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION
Packing	
Power cable 20CM	Flat cable 20CM
Carton size:63.2*37.8*36.5	Volume 0.087CBM
Weight 23kg	QTY/CTN 36PCS/CTN
	19.55PCS/SQM

P2.5 Indoor Full Color Specification

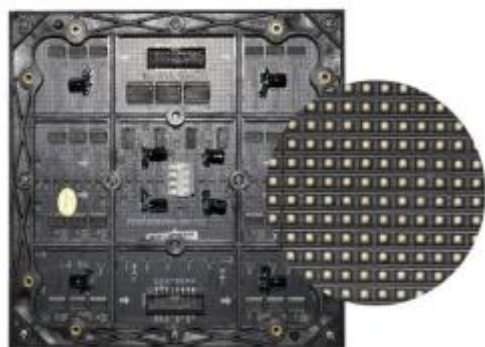


Specification			
Size:160mm×160mm			
LED color:1R1G1B 3in1 led 2121			
Module Power Consumption 6A / 30W			
Constant Current Drive:1/32 Scan IC SM16016/16017			
RLED Epistar{350-400CD} Wavelength625±2nm			
GLED Epistar{6500--750CD} Wavelength520±2nm			
BLED Epistar{200--300CD} Wavelength470±2nm			
Weight0.24kg			
Module Thickness 1.5CM			
Brightness 1200CD			
Module Pixel 64×64=4096 Dot Pixel 2.5mm			
LEDAngle Horizontal≥140° Vertical≥140°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 2 Year		
Screen Parameter	Brightness, automatic adjust by sensors		
	Continuous working time≥48hrs		
	Dot/sqm	160000	
	Best view distance 2.5m--50m		
	Average Power consumption 550W/m²		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 45CM by 2		Flat cable 20CM	
Carton Size 42.8*35.5*39.5		Volume 0.06CBM	
Weight 18.50kg		QTY/CTN 64PCS/CTN	
			39.1PCS/SQM

P3 Indoor Full Color Specification




Specification			
Size:192mm×192mm			
LED color:1R1G1B 3in1 led 2121			
Module Power Consumption 6A / 30W			
Constant Current Drive:1/32Scan IC SM16016			
RLED Epistar{350-400CD} Wavelength625±2nm			
GLED Epistar{6500--750CD} Wavelength520±2nm			
BLED Epistar{200--300CD} Wavelength470±2nm			
Weight0.29kg			
Module Thickness 1.5CM			
Brightness 1200CD			
Module Pixel 64×64=4096 Dot Pixel 3mm			
LEDAngle Horizontal≥140° Vertical≥140°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 2 Year		
Screen Parameter	Brightness, automatic adjust by sensors		
	Continuous working time≥48hrs		
	Dot/sqm	Pixel 11	111 Dot
	Best view distance 3m--60m		
	Average Power consumption 400W/m²		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 45CM by 2		Flat cable 20CM	
Carton Size 49*35.8*46		Volume 0.08CBM	
Weight 22.3kg		QTY/CTN 64PCS/CTN	
			27.13PCS/SQM


P4 Indoor Full Color Specification

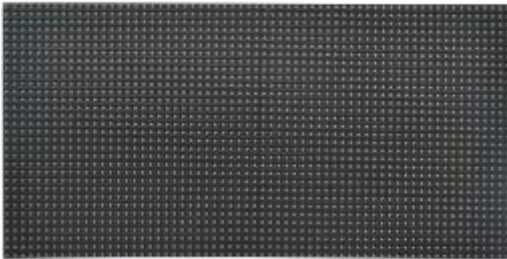 	Specification		
	Size:256mm×128mm		
	LED color:1R1G1B 3in1 led 2121		
	Module Power Consumption 6A / 30W		
	Constant Current Drive:1/16Scan IC SM16016/16017		
	RLED Epistar{350-400CD} Wavelength625±2nm		
	GLED Epistar{6500--750CD} Wavelength520±2nm		
	BLED Epistar{200--300CD} Wavelength470±2nm		
	Weight0.22kg		
	Module Thickness 1.5CM		
	Power Supply VH		
	Brightness 1200CD		
	Module Pixel 64×32=2048 Dot Pixel 4mm		
LEDAngle Horizontal≥140° Vertical≥140°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 2 Year		
Screen Parameter	Brightness, automatic adjust by sensors		
	Pixel	62500 Dot	
	Continuous working time≥48hrs		
	Best view distance 4m--80m		
	Average Power consumption 450W/m²		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 45CM by 2		Flat cable 20CM	
Carton Size 63.2*31.7*30		Volume 0.060CBM	
Weight 9.50kg		QTY/CTN 36PCS/CTN	
		30.6PCS/SQM	


P5 Indoor Full Color Specification

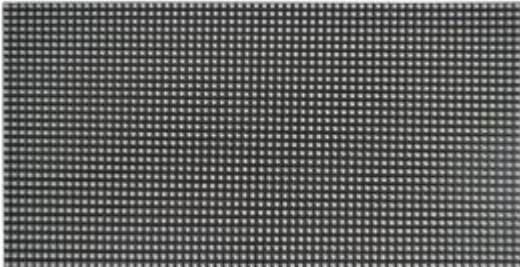	Specification		
	Size:320mm×160mm		
	LED color:1R1G1B 3in1 led 2121		
	Module Power Consumption 6A / 30W		
	Constant Current Drive:1/16Scan IC SM16016/16017		
	RLED Epistar{350-400CD} Wavelength625±2nm		
	GLED Epistar{6500--750CD} Wavelength520±2nm		
	BLED Epistar{200--300CD} Wavelength470±2nm		
	Weight 0.30kg		
	Module Thickness 1.5CM		
	Brightness 1000CD		
	Module Pixel 64×32=2048 Dot Pixel 5mm		
	LEDAngle Horizontal≥140° Vertical≥140°		
	Connector: HUB75		
	Color Ratio: R:G:B/3:6:1		
	Warranty	Use Life 100000Hrs	
		Warranty 2 Year	
	Screen Parameter	Brightness, automatic adjust by sensors	
		Continuous working time≥48hrs	
		Best view distance 5m--90m	
		Pixel 40000 Dot	
		Average Power consumption 300W/㎡	
		ValtageAC220V±10%	
	Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
	Packing		
Power cable 45CM by 2		Flat cable 20CM	
Carton Size 63.2*37.8*36.5		Volume 0.087CBM	
Weight 12kg		QTY/CTN 36PCS/CTN	
		19.6PCS/SQM	



P6 Indoor Full Color Specification

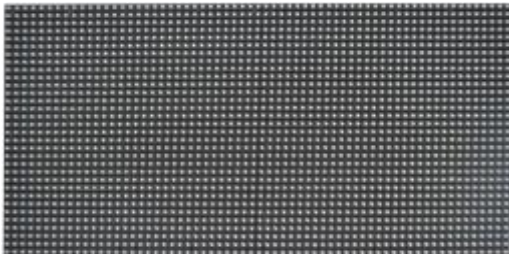 	Specification		
	Size:384mm×192mm		
	LED color:1R1G1B 3in1 led 3528		
	Module Power Consumption 6A / 30W		
	Constant Current Drive:1/16Scan IC SM16016		
	RLED Epistar{350-400CD} Wavelength625±2nm		
	GLED Epistar{6500--750CD} Wavelength520±2nm		
	BLED Epistar{200--300CD} Wavelength470±2nm		
	Weight 0.38kg		
	Module Thickness 1.3CM		
	Brightness 1200CD		
	Module Pixel 64×32=2048 Dot Pixel 6mm		
	LEDAngle Horizontal≥140° Vertical≥140°		
	Connector: HUB75		
	Color Ratio: R:G:B/3:6:1		
	Warranty	Use Life 100000Hrs	
		Warranty 2 Year	
	Screen Paramete r	Brightness, automatic adjust by sensors	
		Continuous working time≥48hrs	
Pixel		27777 Dot	
Best view distance 6m--100m			
Average Power consumption 200W/m²			
VoltageAC220V±10%			
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 45CM by 2		Flat cable 20CM	
Carton Size 47*44*43		Volume 0.088CBM	
Weight 17.30kg		QTY/CTN 30PCS/CTN	
		13.56PCS/SQM	

P8 Outdoor Full Color Module Specification


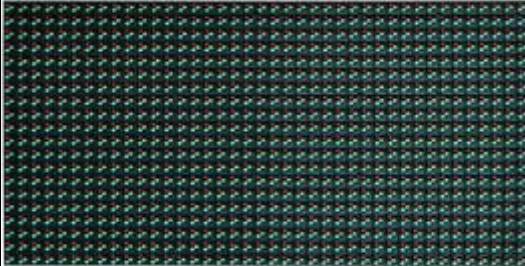
 	Specification		
	Size:256mm×128mm		
	LED color:1R1G1B 246 led		
	Module Power Consumption 6A / 30W		
	Drive:1/4Scan IC JXI5020/SM16016		
	RLED Epistar8*8mil{800-950CD} Wavelength620±2nm		
	GLED Epistar8*8mil{2000--2300CD} Wavelength525±2nm		
	BLED Epistar8*8mil {450--550CD} Wavelength470±2nm		
	Weight0.50		
	Module Thickness 3.1CM		
	Brightness 7000CD		
	Module Pixel 32×16=512 Dot Pixel 8mm		
	LEDAngle Horizontal≥110° Vertical≥55°		
	Connector: HUB75		
	Color Ratio: R:G:B/3:6:1		
	Warranty	Use Life 100000Hrs	
		Warranty 2 year	
	Screen Parameter	Brightness, automatic adjust by sensors	
		Pixel	15625 Dot
		Continuous working time≥72hrs	
		Best view distance 8m--150m	
		Average Power consumption 400W/m²	
		VoltageAC220V±10%	
	Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
	Packing		
	Power cable 45CM by 2		Flat cable 10CM
Carton Size 53.5*43.5*34.5		Volume 0.08CBM	
Weight 26.00kg		QTY/CTN 48PCS/CTN	
		30.6PCS/SQM	

P10 Full Color Module

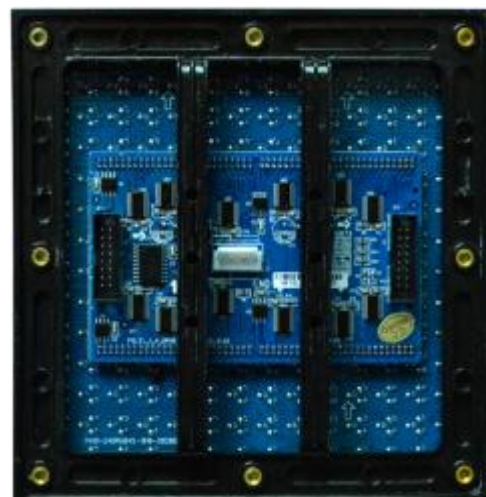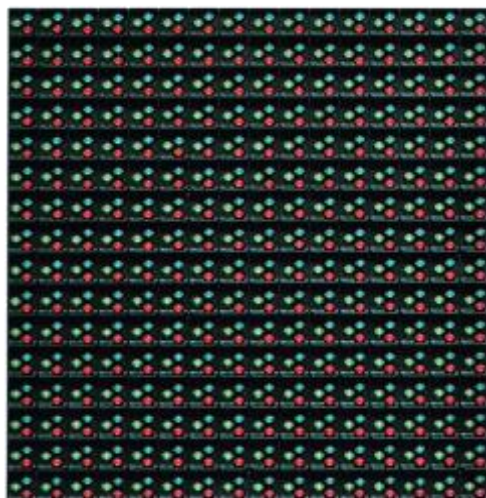

Specification			
Size:160mm×160mm			
LED color:1R1G1B 346 led Reverse Polarity			
Module Power Consumption 4.0A / 20W			
Drive:1/4Scan IC JXI5020			
RLED Epistar8mil{650-850CD} Wavelength620±2nm			
GLED Epistar9mil{1800--2200CD} Wavelength525±2nm			
BLED Epistar9mil {350--450CD} Wavelength470±2nm			
Weight 0.406Kg			
Module Thickness 2.4CM			
Brightness 7500CD			
Module Pixel 16×16=256 Dot Pixel 10mm			
LEDAngle Horizontal≥110° Vertical≥55°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 2 year		
Screen Parameter	Brightness, automatic adjust by sensors		
	Continuous working time≥72Hrs		
	Pixel	Dot10000	Dot
	Best view distance 10m--180m		
	Average Power consumption 400W/m²		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 50CM By 3		Flat cable 10CM	
Carton Size 54*37.5*34.5		Volume 0.07CBM	
Weight 24.5kg		QTY/CTN 56PCS/CTN	
		39.1PCS/SQM	


P10 Full Color Module

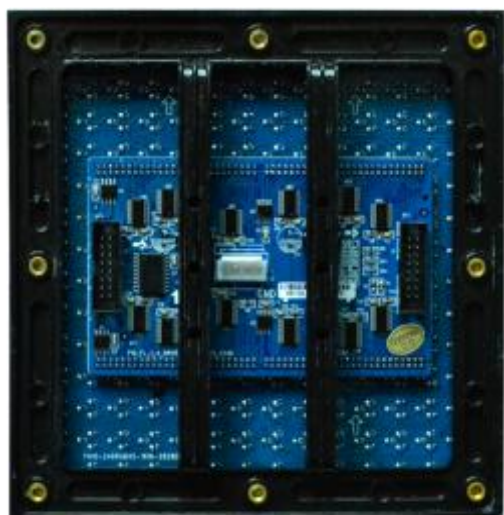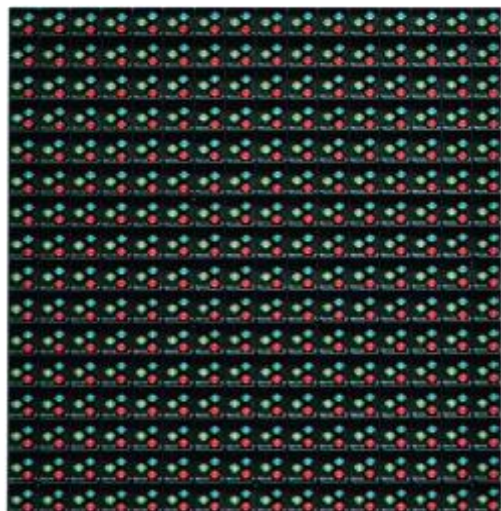



Specification		
Size:160mm×160mm		
LED color:1R1G1B 246 led Reverse Polarity		
Module Power Consumption 3.7A / 18W		
Drive:1/4Scan IC JXI5020		
RLED Epistar8mil{650-850CD} Wavelength620±2nm		
GLED Epistar9mil{1800--2200CD} Wavelength525±2nm		
BLED Epistar9mil {350--450CD} Wavelength470±2nm		
Weight 0.33kg		
Module Thickness 2.4CM		
Brightness 7500CD		
Module Pixel 16×16=256 Dot		
LEDAngle Horizontal≥110° Vertical≥55°		
Connector: HUB75		
Color Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Pixel Dot 10000 Dot	
	Continuous working time≥72Hrs	
	Best view distance 10m--180m	
	Average Power consumption 380W/m²	
	ValtageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 50CM By 3	Flat cable 10CM	
Carton Size 54*37.5*34.5	Volume 0.07CBM	
Weight 20.5kg		QTY/CTN 56PCS/CTN
		39.1PCS/SQM

P10 Outdoor Full Color Specification

Specification	
Size: 320mm×160mm	
LED color: 1R1G1B 246 led	
Module Power Consumption 7.0A / 35W	
Drive: 1/4 Scan IC JXI5120	
RLED Epistar 7mil {550-600CD} Wavelength 620±2nm	
GLED Epistar 8mil {1800--2000CD} Wavelength 525±2nm	
BLED Epistar 8mil {350--450CD} Wavelength 470±2nm	
Weight 0.58kg	
Module Thickness 2.2CM	
Brightness 7500CD	
Module Pixel 32×16=512 Dot	
LED Angle Horizontal ≥ 110° Vertical ≥ 55°	
Connector: HUB75	
Color Ratio: R:G:B/3:6:1	
Warranty	Use Life 90000Hrs
	Warranty 2 Year
Screen Parameter	Brightness, automatic adjust by sensors
	Pixel Dot 10000 Dot
	Continuous working time ≥ 72Hrs
	Best view distance 10m--180m
	Average Power consumption 400W/m²
Voltage AC220V±10%	
Video Signal	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
Packing	
Power cable 20CM	Flat cable 20CM
Carton Size 53.5*43.5*34.5	Volume 0.08CBM
Weight 26.20kg	QTY/CTN 42PCS/CTN
	19.55PCS/SQM


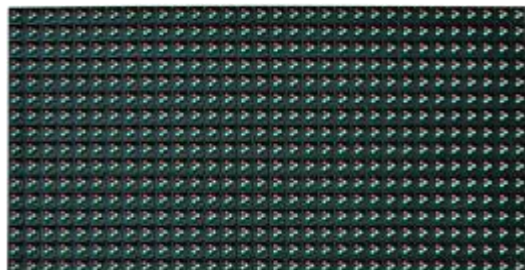


P10 Full Color Module

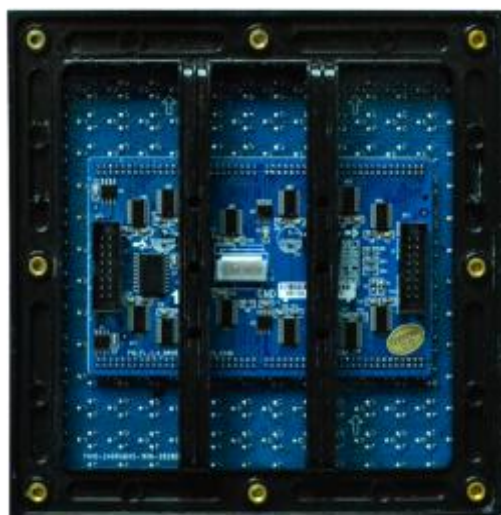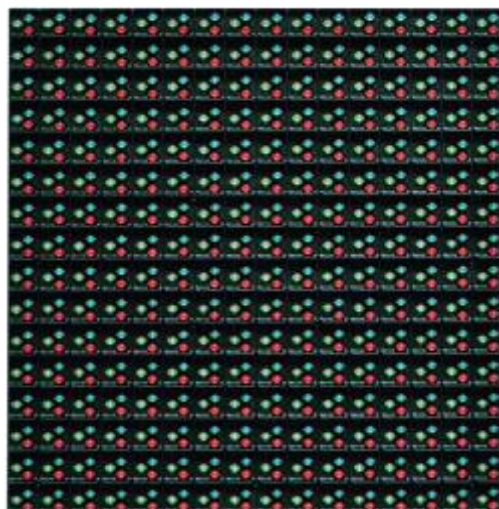


Specification			
Size:160mm×160mm			
LED color:1R1G1B 346 led Positive Polarity			
Module Power Consumption 3.8A / 19W			
Drive:1/4Scan IC JXI5020			
RLED Epistar8mil{650-850CD} Wavelength620±2nm			
GLED Epistar9mil{1800--2200CD} Wavelength525±2nm			
BLED Epistar9mil {350--450CD} Wavelength470±2nm			
Weight 0.406Kg			
Module Thickness 2.4CM			
Brightness 7000CD			
Module Pixel 16×16=256 Dot Pixel 10mm			
LEDAngle Horizontal≥110° Vertical≥55°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 2 Year		
Screen Parameter	Brightness, automatic adjust by sensors		
	Continuous working time≥72Hrs		
	Pixel	Dot10000	Dot
	Best view distance 10m--180m		
	Average Power consumption 380W/m²		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 50CM By 3		Flat cable 10CM	
Carton Size 54*37.5*34.5		Volume 0.07CBM	
Weight 24.5kg		QTY/CTN 56PCS/CTN	
		39.1PCS/SQM	

P10 Full Color Module

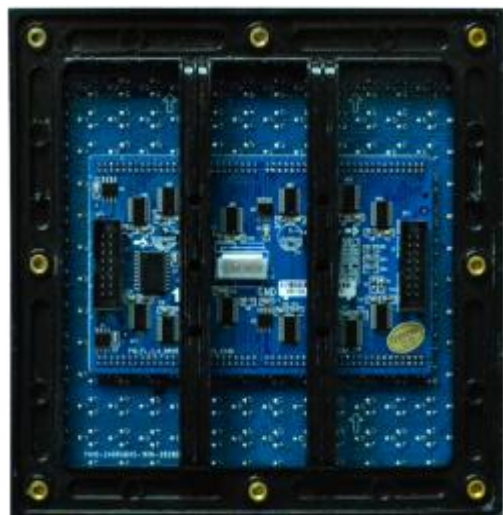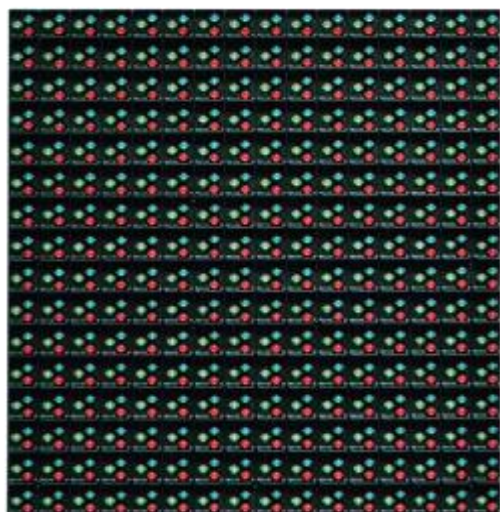

Specification			
Size:160mm×160mm			
LED color:1R1G1B 246 led Positive Polarity			
Module Power Consumption 3.7A / 18W			
Drive:1/4Scan IC JXI5020			
RLED Epistar8mil{650-850CD} Wavelength620±2nm			
GLED Epistar9mil{1800--2200CD} Wavelength525±2nm			
BLED Epistar9mil {350--450CD} Wavelength470±2nm			
Weight 0.33kg			
Module Thickness 2.4CM			
Brightness 7000CD			
Module Pixel 16×16=256 Dot Pixel 10mm			
LEDAngle Horizontal≥110° Vertical≥55°			
Connector: HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life 100000Hrs		
	Warranty 2 Year		
Screen Paramete r	Brightness, automatic adjust by sensors		
	Continuous working time≥72Hrs		
	Pixel	Dot10000	Dot
	Best view distance 10m--180m		
	Average Power consumption 380W/m²		
	ValtageAC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power cable 50CM By 3		Flat cable 10CM	
Carton Size 54*37.5*34.5		Volume 0.07CBM	
Weight 20.48.5kg		QTY/CTN 56PCS/CTN	
		39.1PCS/SQM	


P16 Full color static Module

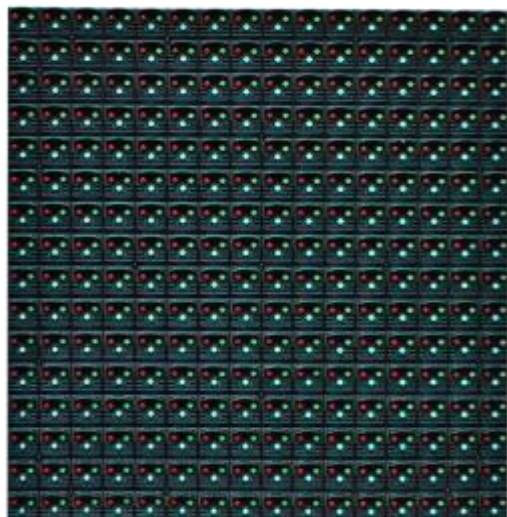

Specification		
Size:256mm×256mm		
LED 1R1G1B 346 led		
Power Consumption 7.5A / 37.5W		
Drive: Static IC JXI5020		
R LED Epistar 8mil{600-800CD} wavelength620±2nm		
G LED Silan 10mil{2100--2300CD}wavelength525±2nm		
B LED Silan 10mil {450--550CD}wavelength470±2nm		
Module weight 0.995gk		
Module thickness 4.0CM		
Brightness>7500CD		
Module Pixel 16×16=512	16mm	
LED angle Horizontal≥110° Vertical≥50°		
Connector: HUB40		
Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Pixel 3906dot/sqm	
	Continuous working time≥72hrs	
	Best view distance 16-300m	
	Average Power consumption 400W/m2	
	Valtage: AC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 20CM/35CM		Flat cable 20CM
Carton Size 58.5*55.5*28.5		Volume 0.092CBM
Weight 25.88kg		QTY/CTN 24PCS/CTN
		25.26PCS/SQM


Shenzhen HLL Technology CO., LTD.

P5 SMD OUTDOOR FULL COLOR

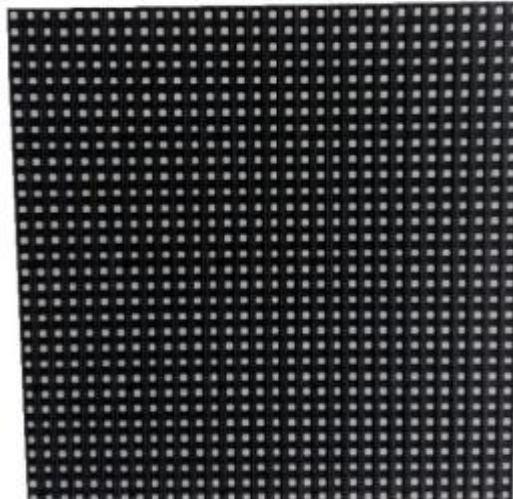 	Specification		
	Size :160mm×160mm		
	LED color :1R1G1B 3in1 LED 2727		
	Module Power Consumption: 6.5A / 32.5W		
	Constant Current Drive :1/8 Scan IC SM16017		
	RLED: Epistar{660-750CD} Wavelength 625±2nm		
	GLED :Epistar{1300-1560CD} Wavelength 520±2nm		
	BLED :Epistar{280-350CD} Wavelength 470±2nm		
	Weight:0.3kg		
	Module Thickness:1.3CM		
	Brightness : 6000CD		
	Module Pixel :32×32=1024 Dot Pixel 6mm		
	LED Angle :Horizontal≥140° Vertical≥140°		
	Connector : HUB75		
	Color Ratio: R:G:B/3:6:1		
	Warranty	Use Life : 100000 hrs	
		Warranty: 2 Year	
	Screen Paramete r	Grey: 16bit	
		Frame Frequency≥60Hz	
Refresh Frequency≥420Hz			
Pixel		40000 dot	
Best View Distance: 5m-50m			
Average Power Consumption 650W/m²			
Valtage AC220V±10%			
MTTF>5000hrs			
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power Cable 45CM by 2		Flat Cable 20CM	
Carton Size 63.2*37.8*19.5		Volume 0.0466cbm	
Weight 13kg		QTY/CTN 36PCS/CTN	
		39PCS/SQM	

Hotline: 18998946779(whatapp) skype:championled www.ledhll.com

P6 SMD OUTDOOR FULL COLOR

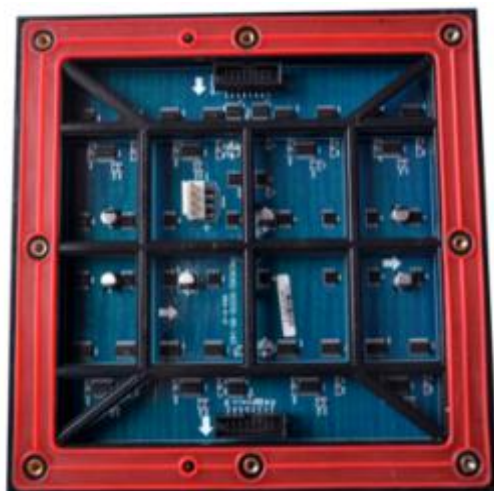

Specification		
Size :192mm×192mm		
LED color :1R1G1B 3in1 LED 3535		
Module Power Consumption: 6.4A / 32W		
Constant Current Drive :1/8 Scan IC SM16016		
RLED: Epistar{660-750CD} Wavelength 625±2nm		
GLED :Epistar{1300-1560CD} Wavelength 520±2nm		
BLED :Epistar{280-350CD} Wavelength 470±2nm		
Weight:0.35kg		
Module Thickness:1.7CM		
Brightness : 6000CD		
Module Pixel :32×32=1024 Dot Pixel 6mm		
LED Angle :Horizontal≥140° Vertical≥140°		
Connector : HUB75		
Color Ratio: R:G/B/3:6:1		
Warranty	Use Life : 100000 hrs	
	Warranty: 2 Year	
Screen Parameter	Grey: 16bit	
	Frame Frequency≥60Hz	
	Refresh Frequency≥420Hz	
	Pixel	27777Dot
	Best View Distance: 6m-100m	
	Average Power Consumption 440W/m²	
	Voltage AC220V±10%	
	MTTF>5000hrs	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power Cable 45CM by 2		Flat Cable 20CM
Carton Size 63.2*44.3*22.5		Volume 0.063cbm
Weight 16kg		QTY/CTN 36PCS/CTN
		27.1PCS/SQM

P8 SMD OUTDOOR FULL COLOR




Specification			
Size :256mm×128mm			
LED color :1R1G1B 3535led			
Module Power Consumption: 6A / 30W			
Constant Current Drive :1/4 Scan IC SM16016/16017			
RLED: Epistar8*8mil{800-950CD} Wavelength 620±2nm			
GLED :Epistar8*8mil{2000--2300CD} Wavelength 525±2nm			
BLED :Epistar8*8mil {450--550CD} Wavelength 470±2nm			
Weight0.27			
Module Thickness:1.8CM			
Brightness :6000CD			
Module Pixel :32×16=512Dot Pixel 8mm			
LED Angle :Horizontal≥140° Vertical≥140°			
Connector : HUB75			
Color Ratio: R:G:B/3:6:1			
Warranty	Use Life : 100000hrs		
	Two year		
Screen Paramete r	Grey:16 bit		
	Frame Frequency≥60Hz		
	Refresh Frequency≥420Hz		
	Pixel	15625Dot	
	Best View Distance: 8m-120m		
	Average Power Consumption 400W/㎡		
	Valtage AC220V±10%		
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION		
Packing			
Power Cable 45CM by2		Flat Cable 10CM	
Carton Size 63.2*31.7*30		Volume 0.06cbm	
Weight 17.00kg		QTY/CTN 36PCS/CTN	
			30.6PCS/SQM



Shenzhen HLL Technology CO., LTD.

P10 SMD OUTDOOR FULL COLOR

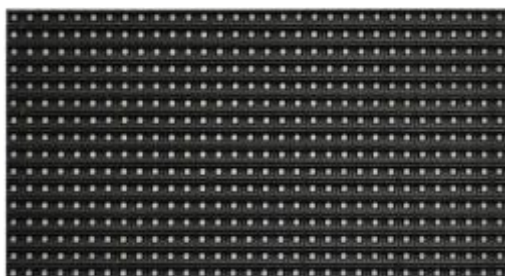

Specification		
Size:320mm×160mm		
LED color:1R1G1B 3in1 SMD3535		
Module Power Consumption 6.5A / 32.5W		
Constant Current Drive:1/2 Scan IC JXI5020/MBI5124		
RLED Epistar{350-400CD} Wavelength625±2nm		
GLED Epistar{6500--750CD} Wavelength520±2nm		
BLED Epistar{200--300CD} Wavelength470±2nm		
Weight 0.35kg		
Module Thickness 1.8CM		
Brightness 6500CD		
Module Pixel 32×16=512 Dot Pixel 10mm		
LEDAngle Horizontal≥140° Vertical≥140°		
Connector: HUB75		
Color Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 Year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Continuous working time≥48hrs	
	Best view distance 5m--90m	
	Pixel 40000 Dot	
	Average Power consumption 420W/m²	
	VoltageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 45CM by 2	Flat cable 20CM	
Carton Size 63.2*37.8*36.5	Volume 0.087CBM	
Weight 17.5kg	QTY/CTN 36PCS/CTN	
		19.6PCS/SQM

Hotline: 18998946779(WhatsApp) skype:championled www.ledhll.com

P3.91 Indoor Full Color Specification



Specification		
Size:250mm×250mm		
LED color:1R1G1B 3in1 led 2121		
Module Power Consumption 8A / 40W		
Constant Current Drive:1/16Scan IC SM16016		
RLED Epistar{350-400CD} Wavelength625±2nm		
GLED Epistar{6500--750CD} Wavelength520±2nm		
BLED Epistar{200--300CD} Wavelength470±2nm		
Weight0.35kg		
Module Thickness 1.5CM		
Brightness 1200CD		
Module Pixel 64×64=4096 Dot Pixel 3mm		
LED Angle Horizontal≥140° Vertical≥140°		
Connector: HUB75		
Color Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 Year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Continuous working time≥48hrs	
	Dot/sqm	Pixel 66536 Dot
	Best view distance 4m--40m	
	Average Power consumption 400W/㎡	
	VoltageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 45CM by 2		Flat cable 20CM
Carton Size 43*34.8*42		Volume 0.08CBM
Weight 22.3kg		QTY/CTN 50PCS/CTN
		27.13PCS/SQM



Shenzhen HLL Technology CO., LTD.

P4.81 Indoor Full Color Specification




Specification		
Size:250mm×250mm		
LED color:1R1G1B 3in1 led 2121		
Module Power Consumption 8A / 40W		
Constant Current Drive:1/13Scan IC SM16016		
RLED Epistar{350-400CD} Wavelength625±2nm		
GLED Epistar{6500--750CD} Wavelength520±2nm		
BLED Epistar{200--300CD} Wavelength470±2nm		
Weight0.35kg		
Module Thickness 1.5CM		
Brightness 1200CD		
Module Pixel 52×52=2704 Dot		
LED Angle Horizontal≥140° Vertical≥140°		
Connector: HUB75		
Color Ratio: R:G:B/3:6:1		
Warranty	Use Life 100000Hrs	
	Warranty 2 Year	
Screen Parameter	Brightness, automatic adjust by sensors	
	Continuous working time≥48hrs	
	Dot/sqm	Pixel 66536 Dot
	Best view distance 5m--50m	
	Average Power consumption 400W/m²	
	ValtageAC220V±10%	
Video Signal	RF、S-Video、RGB、RGBHV、YUV、YC、COMPOSITION	
Packing		
Power cable 45CM by 2	Flat cable 20CM	
Carton Size 43*34.8*42	Volume 0.08CBM	
Weight 22.3kg	QTY/CTN 50PCS/CTN	
		27.13PCS/SQM

Hotline: 18998946779(WhatsApp) skype:championled www.ledhll.com



Shenzhen HLL Technology

P6 Indoor Full Color Specification

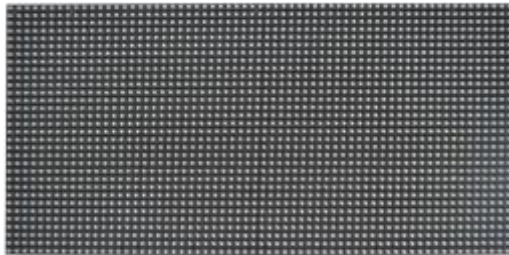	Specification			
	Size:384mm×192mm			
	LED color:1R1G1B 3in1 led 3528			
	Module Power Consumption 6A / 30W			
	Constant Current Drive:1/16Scan IC S			
	RLED Epistar{350-400CD} Wavelength			
	GLED Epistar{6500--750CD} Wavelength			
	BLED Epistar{200--300CD} Wavelength			
	Weight 0.38kg			
	Module Thickness 1.3CM			
	Brightness 1200CD			
	Module Pixel 64×32=2048 Dot Pixel 6			
	LEDAngle Horizontal≥140° Vertical≥1			
	Connector: HUB75			
	Color Ratio: R:G:B/3:6:1			
	Warranty	Use Life 100000Hrs		
		Warranty 2 Year		
	Screen Parameter	Brightness, automatic adj		
		Continuous working time≥		
		Pixel		
Best view distance 6m--10				
Average Power consumption				
	ValtageAC220V±10%			
Video Signal	RF、S-Video、RGB、RGBHV、Y			
Packing				
Power cable 45CM by 2				
Carton Size 47*44*43				
Weight 17.30kg				

Y CO., LTD.

tion

SM16016
625±2nm
gth520±2nm
h470±2nm
nm
140°
ust by sensors
≥48hrs
27777 Dot
00m
on 200W/m²
JV、YC、COMPOSITION
Flat cable 20CM
Volume 0.088CBM
QTY/CTN 30PCS/CTN
13.56PCS/SQM